




High Speed Door 114 RL Self Repairable[®] for Clean rooms


It is the best solution for Access and separations of inland areas, especially suitable for locations where cleaning and conservation of air are essential, such as laboratories, providing a fast and secure access.

It incorporates a system that allows, in the event of an impact against the canvas, the canvas pops out of the guides to return to be entered automatically to lift the door at the touch of a button, so the repair and maintenance costs are minimized.

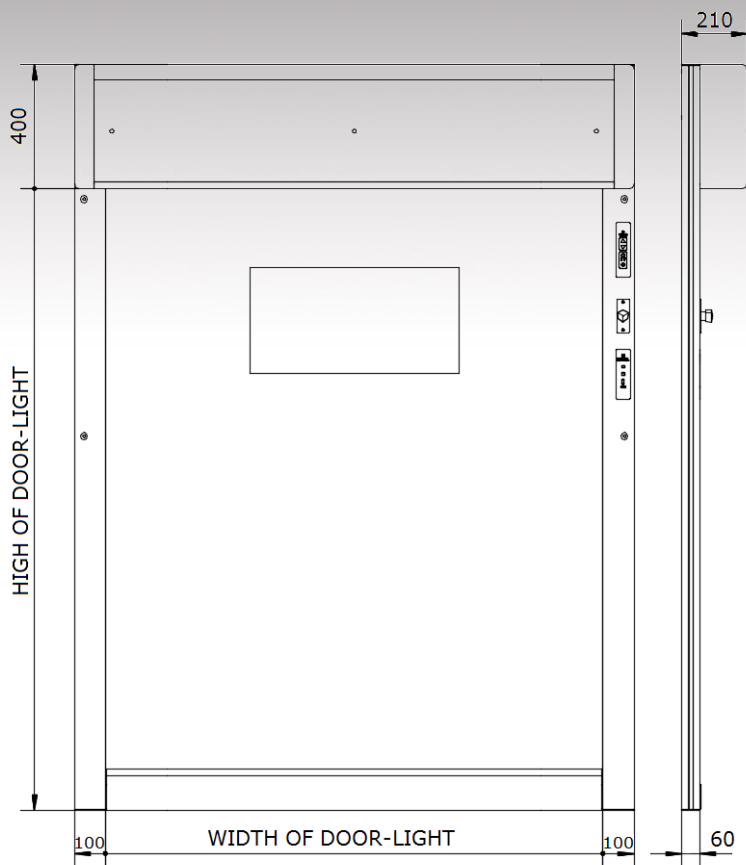

Product standard: EN 13241-1			
Section of this standard	Essential characteristics	Units	Value
4.2.8	Safe opening	-	AGREE
4.2.5	Glass components	-	DO NOT APPLY
4.2.3	Mechanical resistance and estabily	-	AGREE
4.3.3	Manual strength	-	AGREE
4.4.1	Water permeability	-	DO NOT APPLY
4.2.9	Danger substance emission	-	AGREE
4.4.3	Resistance to the wind load	Pa	170 Pa (≤ 60 km/h)
4.4.4	Direct noise reduction	dB(A)	DO NOT APPLY
4.4.5	Thermal resistance	W/(m ² -K)	DO NOT APPLY
4.4.6	Air permeability	m ³ /(m ² -h)	CLASS 3
4.2.4 y 4.4.7	Durability	-	Cycles: 250.000

High Speed Door for Clean rooms 114 RL

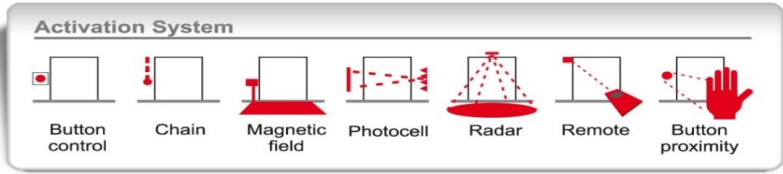TECHNICAL DATA										
MAXIMUM MEASUREMENTS (mm)	W=3000 X H=3500									
APPLICATIONS AREA	INTERIOR (0°C ~ +50°C)									
OPENING SPEED	STANDARD UP TO 1 m/s									
CLOSING SPEED	STANDARD DOWN TO 0,6 m/s									
STRUCTURE MATERIALS	ALUMINIUM									
ROLLED DRUM	ALUMINIUM									
CANVAS	FRAMEPROOF TYPE M2, THICKNESSES 0,8 mm (950gr/m2)									
GEARED MOTOR	BELT TRANSMISION									
SAFETY SYSTEM	ANTI-DROP SYSTEM									
SENSITIVE SAFETY SYSTEM	PHOTOCELL									
CONTROL PANEL WITH CONVERTER AND AUTOMATON	INTERNAL									
ELECTRIC SUPPLY	220-240 V a.c. (F+N+PE) 50-60 Hz 0,40-0,55 kW									
ACTIVATION SYSTEMS										
STRUCTURE COLOURS	<table border="1" data-bbox="564 1373 887 1440"> <tr> <td>LACQUERED</td> <td></td> </tr> <tr> <td></td> <td>WHITE</td> </tr> </table> <p>*FOR OTHER COLOURS, PLEASE CONSULT</p>	LACQUERED			WHITE					
LACQUERED										
	WHITE									
CANVAS COLOURS*	<table border="1" data-bbox="459 1574 1410 1641"> <tr> <td>WHITE</td> <td>9005</td> <td>7016</td> <td>3002</td> <td>6026</td> <td>5002</td> <td>1003</td> <td>7030</td> <td>2004</td> </tr> </table> <p>FOR OTHER COLOURS, PLEASE CONSULT</p> <p>*OPTIONAL ANTISTATIC BLUE CANVAS</p>	WHITE	9005	7016	3002	6026	5002	1003	7030	2004
WHITE	9005	7016	3002	6026	5002	1003	7030	2004		
WINDOWS CANVAS	STANDARD: 1 ROW OF WINDOWS									
ADDITIONAL FEATURES	SAS (INTERLOCK) - ROLLER CONVEYOR - DOUBLE HEIGHT - COMMUNICATION - ANTI-HUMIDITY KIT STAINLESS STEEL COMPONENTS - IP 65 MOTOR AND PUSH BUTTONS - FOR OTHER OPTIONS, PLEASE CONSULT.									

CONTROLSA, S.A reserves the right to change models and characteristics without prior warning. The technical data published in this catalogue is provided for information only, and entails no commitment whatsoever by CONTROLSA, S.A.

The total or partial reproduction of the data, drawings and/or photographs used in this catalogue is totally forbidden, as is any transmission by electronic, mechanical, reprographic or magnetic medium

